

Infusion Series® Coffee Brewer - Tall



Features

Infusion Coffee Brewer

- Large 3-gallon (11.36 litre) tank provides back-to-back brewing capacity.
- Three brew buttons allow for 3 separate brewing profiles. Two programmable batch switches allow full and half batch brewing.
- Includes overlay kits for customization of brewer interface.
- Easy Pulse interface allows automatic programming of pulse routine.
- BrewWISE® intelligence with pre-infusion and pulse brew for maximum flavor extraction. DBC grinder communicates with brewer through Smart Funnel®.
- Energy-saver mode reduces tank temperature during idle periods.
- Digital display in English/Spanish for easier programming and control. Advertising messages and machine status also displayed. Display capable of showing English or Metric measurements.
- Trunk height accommodates both 3.8 litre and 5.7 litre TF servers with base.

Model ICB-Tall with 5.7L Digital ThermoFresh® Server

(TF server sold separately)

Dimensions: 34.4"H x 10.1"W x 20.6"D
(87.4cm H x 25.7cm W x 52.4cm D)

For current specification sheets and other information, go to www.bunn.com.

International models may vary in appearance.

Related Products

Easy Clear® EQHP-10
Product No. : 39000.0004



Easy Clear® EQHP-10L
Product No. : 39000.0001

Single/Dual Filter Pack
Product No. : 20138.0000
Packed per case: 500



5.7 litre (1.5 gal) ThermoFresh Server
Product No.: 39550.0000

5.7 litre (1.5 gal) Digital ThermoFresh Server
Product No.: 39550.0050




3.8 litre (1 gal) ThermoFresh Server
Product No.: 39500.0000

3.8 litre (1 gal) Digital ThermoFresh Server
Product No.: 39500.0050



Dimensions & Specifications

Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Capacity	Shipping Weight	Cord Attached	Agency
ICBA-Tall	36600.0006	230	14	3000	3200	9.8 gal (37.10 L)	51 lbs (23.1 kg)	Yes	CE 


Power cord 33529.0004

Inlet hose assembly 32865.0002

Brewing Capacity: based on incoming water temp of 15.5°C (60° F) 60°C (140°F) rise.

Electrical: 230V model requires 2-wire grounded service rated 220-240V, single phase, 50/60 Hz.

Plumbing: 20-90 psi (138-621 kPa). Supplied with 3/8" male flare fitting. Requires minimum of .80 gpm (3.03 lpm) water flow.

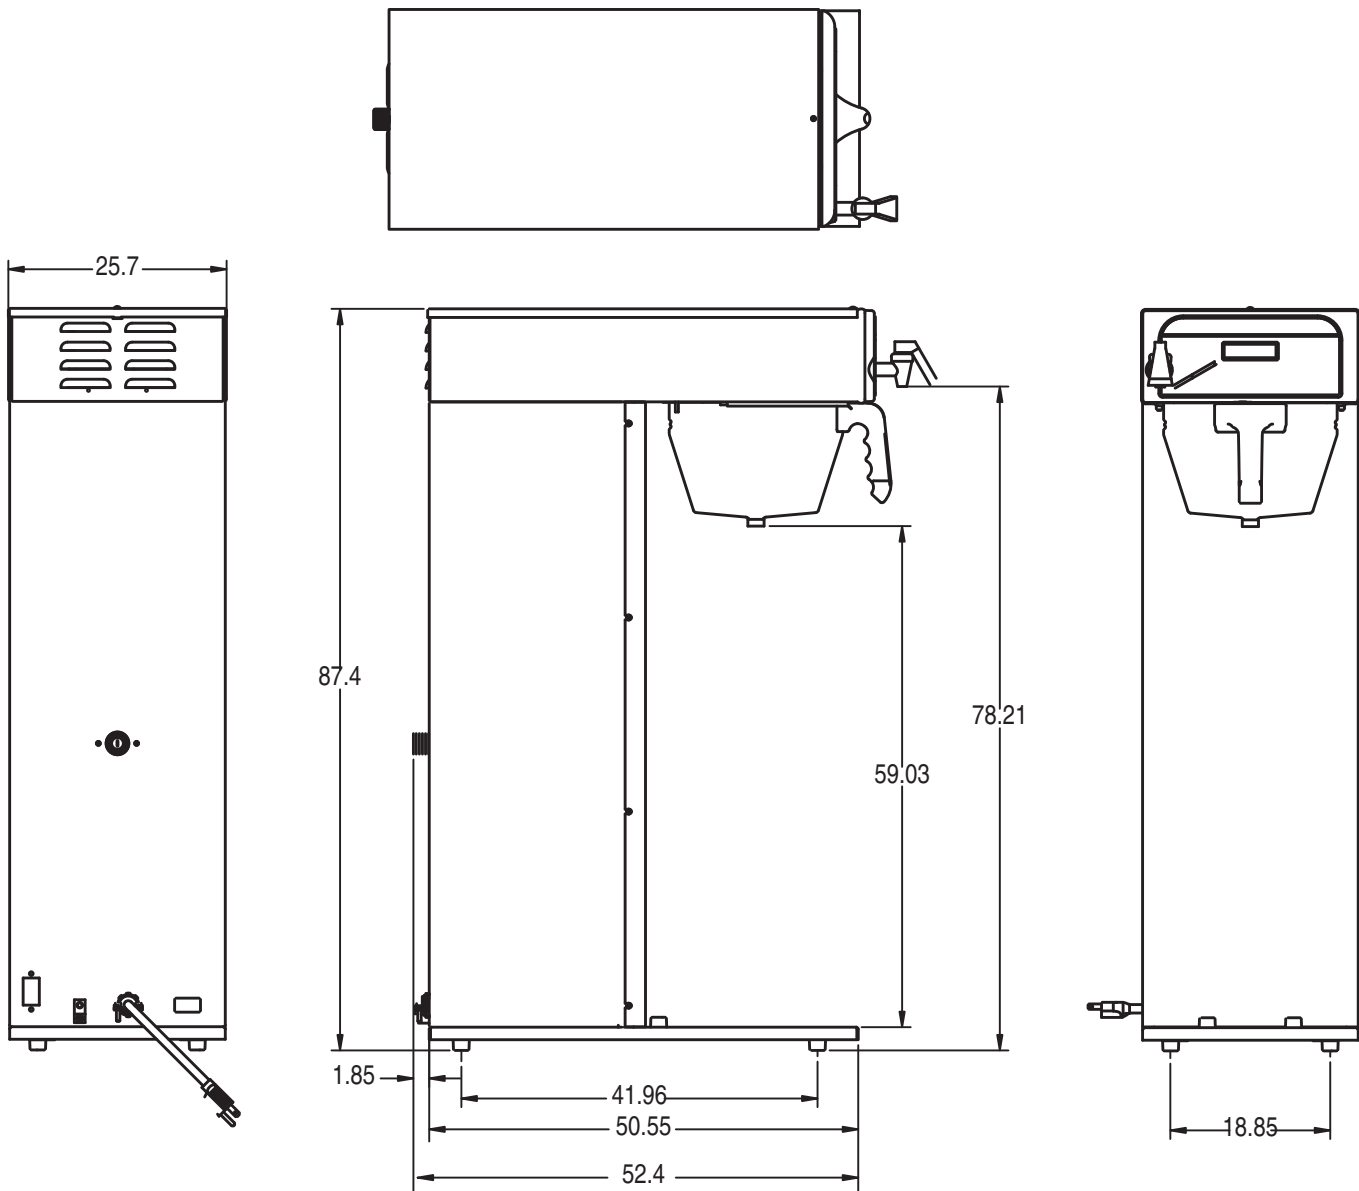

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • USA • +1-217-529-6601 • Fax +1-217-529-2827 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in centimeters.

4/09 © Bunn-O-Matic Corporation